



IP20



IK06



L90/B10

72,000 hrs

powered by



**TRIDONIC**

The Dorchester range incorporates a powder-coated aluminium extruded housing and acrylic opal diffuser which produces a homogeneous illumination and can be supplied as direct only version, direct/in-direct version and a recessed version. Available in four lengths as standard, 1130mm, 1410mm, 1690mm and 2250mm. Other lengths are available on request.


Supplied as CRI 80 as standard, with a high colour stability of 3 MacAdam steps, the Dorchester is available in a black or white powder-coated finishes and silver anodised finish and 4000K cool white colour temperature and along with a range of control options. The emergency range of the Dorchester are fitted with the latest lithium iron phosphate LiFePO4 battery technology, which has a 3-year battery warranty.

The Dorchester range seamlessly integrates with SCC's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

# DORCHESTER DIRECT/IN-DIRECT

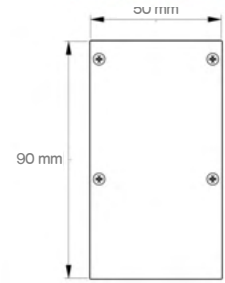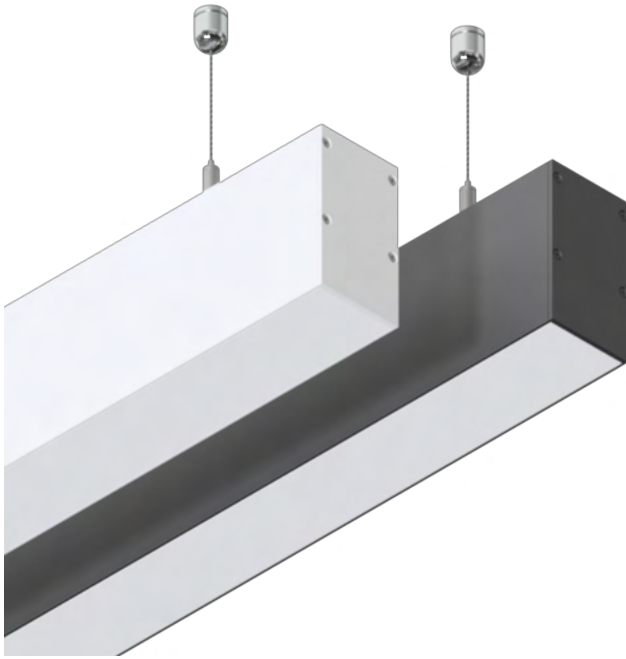

powered by  
**TRIDONIC**



Product code	Length mm	Width mm	Height mm	Output lm	Power W	Efficacy lm/W	CCT K
LUXDOR/DI/1130/1700/4K	1130	50	90	1654	13.84	120	4000
LUXDOR/DI/1130/2500/4K	1130	50	90	2490	19.94	125	4000
LUXDOR/DI/1130/3300/4K	1130	50	90	3311	26.52	125	4000
LUXDOR/DI/1410/2100/4K	1410	50	90	2105	16.87	125	4000
LUXDOR/DI/1410/3200/4K	1410	50	90	3169	25.08	126	4000
LUXDOR/DI/1410/4200/4K	1410	50	90	4214	33.43	126	4000
LUXDOR/DI/1690/2600/4K	1690	50	90	2556	20.25	126	4000
LUXDOR/DI/1690/3800/4K	1690	50	90	3848	30.22	127	4000
LUXDOR/DI/1690/5100/4K	1690	50	90	5117	40.34	127	4000
LUXDOR/DI/2250/3500/4K	2250	50	90	3458	26.02	133	4000
LUXDOR/DI/2250/5200/4K	2250	50	90	5206	40.48	129	4000
LUXDOR/DI/2250/6900/4K	2250	50	90	6923	54.17	128	4000



DD = DALI Dimmable  
E = Emergency  
BL = Black finish

SD = SwitchDim  
ST = Self Test Emergency  
WH = White finish


MD = Mymesh Dim  
ME = Mymesh Emergency  
SL = Silver finish

CD = Casambi Dim  
SL\*\* = Slave

# DORCHESTER DIRECT/IN-DIRECT LOW GLARE

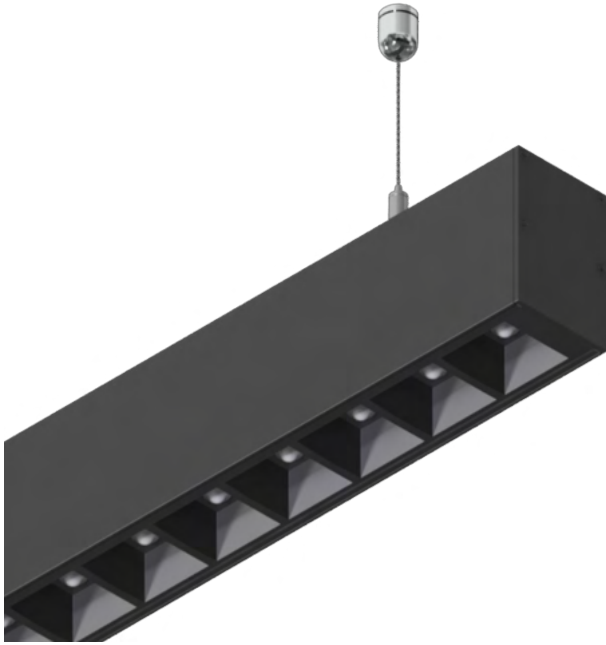

powered by  
**TRIDONIC**



Product code	Length mm	Width mm	Height mm	Output lm	Power W	Efficacy lm/W	CCT K
LUXDOR/DI/LG/1130/1200/4K	1130	50	75	1717	13	130	4000
LUXDOR/DI/LG/1130/1800/4K	1130	50	75	2585	19	136	4000
LUXDOR/DI/LG/1130/2400/4K	1130	50	75	3438	25	135	4000
LUXDOR/DI/LG/1410/1500/4K	1410	50	75	2184	17	132	4000
LUXDOR/DI/LG/1410/2200/4K	1410	50	75	3288	24	135	4000
LUXDOR/DI/LG/1410/3000/4K	1410	50	75	4372	33	134	4000
LUXDOR/DI/LG/1690/1800/4K	1690	50	75	2651	20	133	4000
LUXDOR/DI/LG/1690/2700/4K	1690	50	75	3991	29	138	4000
LUXDOR/DI/LG/1690/3600/4K	1690	50	75	5307	39	136	4000
LUXDOR/DI/LG/2250/2400/4K	2250	50	75	3585	27	134	4000
LUXDOR/DI/LG/2250/3600/4K	2250	50	75	5397	38	141	4000
LUXDOR/DI/LG/2250/4800/4K	2250	50	75	7176	52	139	4000

DD = DALI Dimmable  
E = Emergency  
BL = Black finish

SD = SwitchDim  
ST = Self Test Emergency  
WH = White finish

MD = Mymesh Dim  
ME = Mymesh Emergency  
SL = Silver finish

CD = Casambi Dim  
SL\*\* = Slave