



ESKDALE RANGE

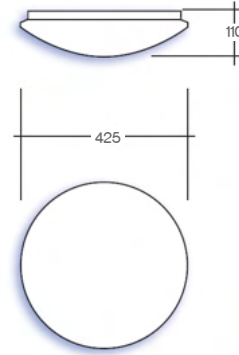

powered by
TRIDONIC



IP20
 IK04
 L80/B10
72,000 hrs

The Eskdale LED luminaire has been meticulously crafted to meet the highest standards of specifications and energy-saving requirements. It features high output Tridonic LED boards that come in both neutral white and warm white colour temperatures, making it an ideal luminaire for a wide range of commercial and residential applications.

Supplied as CRI 80 as standard, with a high colour stability of 3 MacAdam steps, the Eskdale is available with a range of control options including corridor function. The emergency range of the Eskdale emergency versions are fitted with the latest lithium iron phosphate LiFePO4 battery technology, which has a 3-year battery warranty.

The Eskdale range seamlessly integrates with SCC's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Diameter mm	Height mm	Efficacy lm/W	CRI	CCT K
LUXESK/2000/3K	14	1892	425	110	135	80	3,000
LUXESK/2000/4K	14	1987	425	110	142	80	4,000
LUXESK/3000/3K	22	2926	425	110	133	80	3,000
LUXESK/3000/4K	22	3073	425	110	139	80	4,000
LUXESK/4000/3K	28	3686	425	110	130	80	3,000
LUXESK/4000/4K	28	3867	425	110	137	80	4,000

DD = DALI Dimmable
E = Emergency
CF = Corridor Function

SD = SwitchDim
ST = Self Test Emergency
MW = Sensor On/Off

MD = Mymesh Dim
ME = Mymesh Emergency

CD = Casambi Dim
SL** = Slave