



H? PPMU RANGE

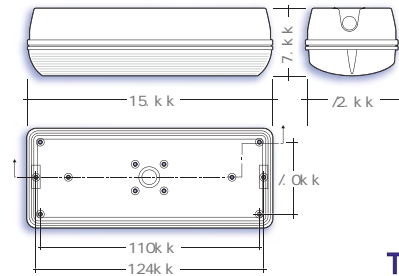

powered by
TRIDONIC



IP IP66 **IK** IK10 **LB** L80/B10
72,000 hrs

The Jarrow range incorporates impact resistant polycarbonate base and diffuser along with Tridonic high-performance LED board and driver making the bulkhead a highly efficient lighting fixture that can meet even the most rigorous energy-saving requirements. It is ideal for commercial and domestic use and has been designed to be both economical and efficient.

Supplied as CRI 80 as standard, with a high colour stability of 3 MacAdam steps, the Jarrow is available with white or black base and either cool or warm white colour temperature and along with a range of control options including corridor function. The emergency range of the Jarrow emergency versions are fitted with the latest lithium iron phosphate LiFePO4 battery technology, which has a 3-year battery warranty.

The Jarrow range seamlessly integrates with SCC's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

| Part code | Charging M* W | Charging NM* W | Duration hrs | Cells LiFePO4 | Weight kg |
|-----------|------------------|-------------------|-----------------|------------------|--------------|
| LUXJAR/M | 5.7 | 0.2 | 3 | 3.2V 3.8Ah | 0.8 |
| LUXJAR/ST | 5.4 | 0.3 | 3 | 3.2V 3.8Ah | 0.8 |
| LUXJAR/DA | 5.4 | 0.3 | 3 | 3.2V 3.8Ah | 0.8 |
| LUXJAR/ME | 5.6 | 0.5 | 3 | 3.2V 3.8Ah | 0.8 |

* Following its initial charge, the unit will spend 90% of its operational life in standby mode.

M = Switched Maintained
SL** = Slave

ST = Self Test Emergency
OP = Opal Diffuser

DA = DALI Addressable
CF = Clear Fresnel Diffuser

ME = Mymesh Emergency
LK = Legend Kit