



LOWCROFT RANGE



powered by
TRIDONIC

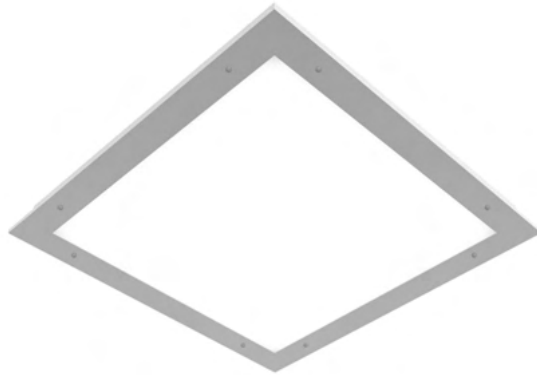

IP65




IK08



L80/B10
50,000 hrs



TP(a)



The Lowcroft LED panel is a high-quality luminaire that boasts a TPa rating and LG7 compliance. Its low glare micrprismatic diffuser makes it both visually pleasing and suitable for various installations.

The Ludlow is available in 3000K, 4000K, and 6500K, offering a range of colour temperatures to suit any environment. It is energy-efficient, flicker-free, and produces minimal heat, ensuring a long lifespan of at least 50,000 hours. This makes it an ideal, eco-friendly choice for clean room and healthcare environments.

The Lowcroft range seamlessly integrates with SCC's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Length mm	Height mm	Efficacy lm/W	CRI	CCT K
LUXLOW/MP/2000/4K	17	2046	625	70	120	80	4,000
LUXLOW/MP/2500/4K	21	2509	625	70	119	80	4,000
LUXLOW/MP/3000/4K	26	2988	625	70	115	80	4,000
LUXLOW/MP/3500/4K	30	3459	625	70	114	80	4,000
LUXLOW/MP/4000/4K	35	3921	625	70	112	80	4,000
LUXLOW/MP/5500/4K	48	5541	625	70	110	80	4,000

DD = DALI Dimmable
E = Emergency
3K = 3000K CCT

SD = SwitchDim
ST = Self Test Emergency
6.5K = 6500K CCT

MD = Mymesh Dim
ME = Mymesh Emergency
TW = Tunable White

CD = Casambi Dim
SL** = Slave
90 = Ra90+