


# LUDLOW RANGE



powered by  
**TRIDONIC**

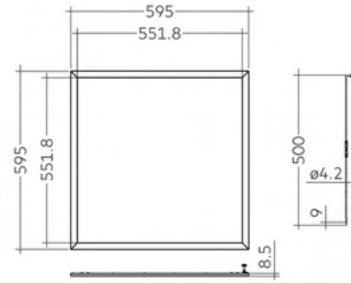

IP20




IK02



L80/B10  
50,000 hrs



TP(a)



The Ludlow LED panel is a high-quality luminaire that boasts a TPa rating and LG7 compliance. Its low glare micrprismatic diffuser makes it both visually pleasing and suitable for various installations, especially those with shallow ceiling voids.

The Ludlow is available in 3000K, 4000K, and 6500K, offering a range of color temperatures to suit any environment. It is energy-efficient, flicker-free, and produces minimal heat, ensuring a long lifespan of at least 50,000 hours. This makes it an ideal, eco-friendly choice for commercial and retail applications.

The Ludlow range seamlessly integrates with Trojan's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Length mm	Height mm	Efficacy lm/W	CRI	CCT K
LUXLUD/2000/4K	17	2046	595	9	120	80	4,000
LUXLUD/2500/4K	21	2509	595	9	119	80	4,000
LUXLUD/3000/4K	26	2988	595	9	115	80	4,000
LUXLUD/3500/4K	30	3459	595	9	114	80	4,000
LUXLUD/4000/4K	35	3921	595	9	112	80	4,000
LUXLUD/4500/4K	40	4389	595	9	110	80	4,000

DD = DALI Dimmable  
E = Emergency  
3K = 3000K CCT

SD = SwitchDim  
ST = Self Test Emergency  
6.5K = 6500K CCT

MD = Mymesh Dim  
ME = Mymesh Emergency  
TW = Tunable White

CD = Casambi Dim  
SL\*\* = Slave