



# WALDRON RANGE

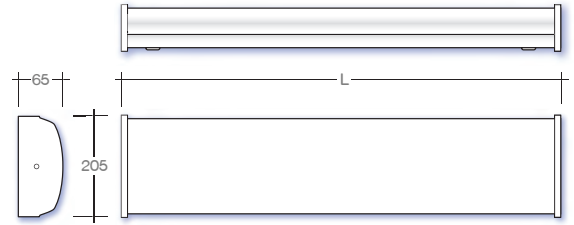

powered by  
**TRIDONIC**



- IP44
- IK05
- L90/B10  
50,000 hrs
- TP(a)

The Waldron range presents a stylish solution that meets DHSS guidelines. With an IP44 rating, the fitting provides protection against dust and insects. The end caps are firmly secured with a stainless steel screw, which can be replaced with a tamper-proof screw to prevent any unauthorized access.

The linear range is available in 3000K, 4000K, 5000K and tunable white colour temperatures, providing flexibility in achieving the desired lighting ambience. Fitted with a low glare TP(a) diffuser and the use of optimised thermal management technology results in an expected lifespan of 50,000 hours (L90) with a colour stability within 3 MacAdam steps.

The Waldron range seamlessly integrates with SCC's standard options, offering choices such as dimmable functionality and emergency configurations. Additionally, these luminaires can be seamlessly integrated into our intelligent lighting systems through wireless options, ushering in a new era of versatile illumination solutions.

Part code	Power W	Output lm	Length mm	Width mm	Depth mm	Efficacy lm/W	Weight kg
LUXWAL/6/1400/4K	9	1432	663	205	65	152	1.9
LUXWAL/6/2400/4K	17	2387	663	205	65	143	1.9
LUXWAL/6/3300/4K	25	3325	663	205	65	135	1.9
LUXWAL/12/2900/4K	19	2864	1210	205	65	152	2.8
LUXWAL/12/4800/4K	34	4773	1210	205	65	142	2.8
LUXWAL/12/6600/4K	49	6650	1210	205	65	135	2.8
LUXWAL/15/3600/4K	23	3580	1510	205	65	152	3.2
LUXWAL/15/6000/4K	42	5967	1510	205	65	142	3.2
LUXWAL/15/8300/4K	62	8312	1510	205	65	135	3.2

DD = DALI Dimmable  
E = Emergency  
3K = 3000K CCT

SD = SwitchDim  
ST = Self Test Emergency  
5K = 5000K CCT

MD = Mymesh Dim  
ME = Mymesh Emergency  
TW = Tunable White

CD = Casambi Dim  
SL\*\* = Slave